

- PRETECH CORPORATION IS A NPCA CERTIFIED PLANT
- ALL DIAMETERS ARE GASKET JOINT
- 15" thru 36" are Single Bevel Offset Joint

PRETECH CORP. REINFORCED CONCRETE PIPE CONFORMS TO

- ASTM C-76
- AASHTO M170

GASKET JOINT MEETS

- ASTM C443
- ASTM C361


FOR COMPLETE DESIGN AND PRODUCT DESIGN INFORMATION CONTACT PRETECH CORP.

PRETECH CORP. reserves the right to make changes to product design and/or dimensions without notice.

Please contact Pretech Corp. for confirmation or advice for your project design. Specialty pieces and designs are available, upon request.

'A' INSIDE DIAMETER	'B' LAYING LENGTH	'C' WALL THICKNESS	'D' BARREL O.D.	'E' BELL O.D.	'F' JOINT DEPTH	AREA PER FT ²	WALL TYPE	CLASS	Wt/ft	PRODUCT WEIGHT
15" RCP	8'- 0"	2.25"	19.5"	24"	3.625"	1.2 ft ²	B wall		136 lbs	1,125 lbs
18" RCP	8'- 0"	2.5"	23"	27.875"	3.625"	1.8 ft ²	B wall		183 lbs	1,520 lbs
24" RCP	8'- 0"	3"	30"	35.5625"	3.875"	3.1 ft ²	B wall		289 lbs	2,410 lbs
30" RCP	8'- 0"	3.5"	37"	42.625"	4"	4.9 ft ²	B wall		410 lbs	3,420 lbs
36" RCP	8'- 0"	4"	44"	50.375"	4.125"	7.1 ft ²	B wall		568 lbs	4,740 lbs

PIPE IS FURNISHED WITHOUT LIFT HOLES. LIFT HOLES CAN BE FURNISHED, UPON REQUEST FOR A STANDARD SET-UP FEE

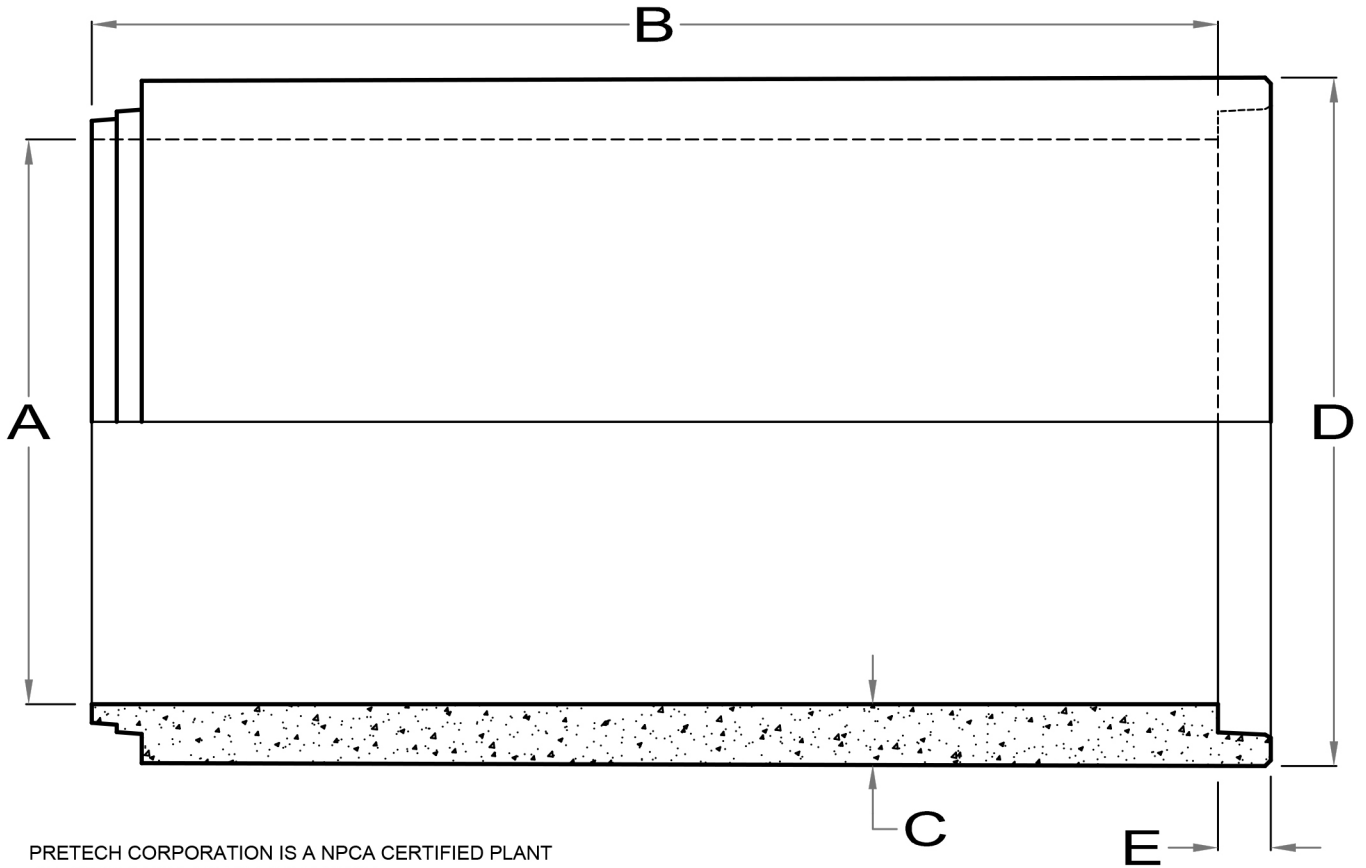

- PRETECH CORPORATION IS A NPCA CERTIFIED PLANT
- ALL DIAMETERS ARE GASKET JOINT
- 42", 48", 54", 60", 72", and 78" are Single Bevel Offset Joint

PRETECH CORP. REINFORCED CONCRETE PIPE MEETS OR EXCEEDS:

- ASTM C-76
 - AASHTO M170
- GASKET JOINT MEETS
- ASTM C443
 - ASTM C361

FOR COMPLETE DESIGN AND PRODUCT DESIGN INFORMATION CONTACT PRETECH CORP.

PRETECH CORP. reserves the right to make changes to product design and/or dimensions without notice.

Please contact Pretech Corp. for confirmation or advice for your project design. Specialty pieces and designs are available, upon request.

'A' INSIDE DIAMETER	'B' LAY LENGTH	'C' WALL THICKNESS	'D' PIPE O.D.	'E' JOINT DEPTH	AREA PER FT ²	WALL TYPE	CLASS	Wt/ft	PRODUCT WEIGHT
42" RCP	8'- 0"	4.5"	51.125"	4.125"	9.6 ft ²	B	III to V	658 lbs	5,500 lbs
48" RCP	8'- 0"	5"	58.5"	4.5"	12.6 ft ²	B	III to V	834 lbs	6,970 lbs
54" RCP	8'- 0"	6.25"	66.5"	4.25"	15.9 ft ²	C	III to V	1,250 lbs	10,050 lbs
60" RCP	8'- 0"	6.75"	73.5"	4.75"	19.6 ft ²	C	III to V	1,475 lbs	11,850 lbs
72" RCP	8'- 0"	7.75"	87.5"	5.00"	28.3 ft ²	C	III to V	2,025 lbs	16,200 lbs
78" RCP	8'- 0"	8.25"	94.5"	4.875"	33.2 ft ²	C	III to V	2,300 lbs	18,400 lbs
*84" RCP	7'- 0"	8.00"	100"	6.00"	38.5 ft ²	B	III to V	2,480 lbs	17,360 lbs
*96" RCP	8'- 0"	9.00"	114"	6.00"	50.3 ft ²	B	III to V	3,190 lbs	25,520 lbs

*AVAILABLE IN MASTIC JOINT ONLY

PIPE IS FURNISHED WITHOUT LIFT HOLES. LIFT HOLES CAN BE FURNISHED, UPON REQUEST.